




PATH NAME: /E1/PARTS/STD/DGN/STD/327-COMARVAC-RVVVAULT-2IN.DGN LFM 05/02/2012

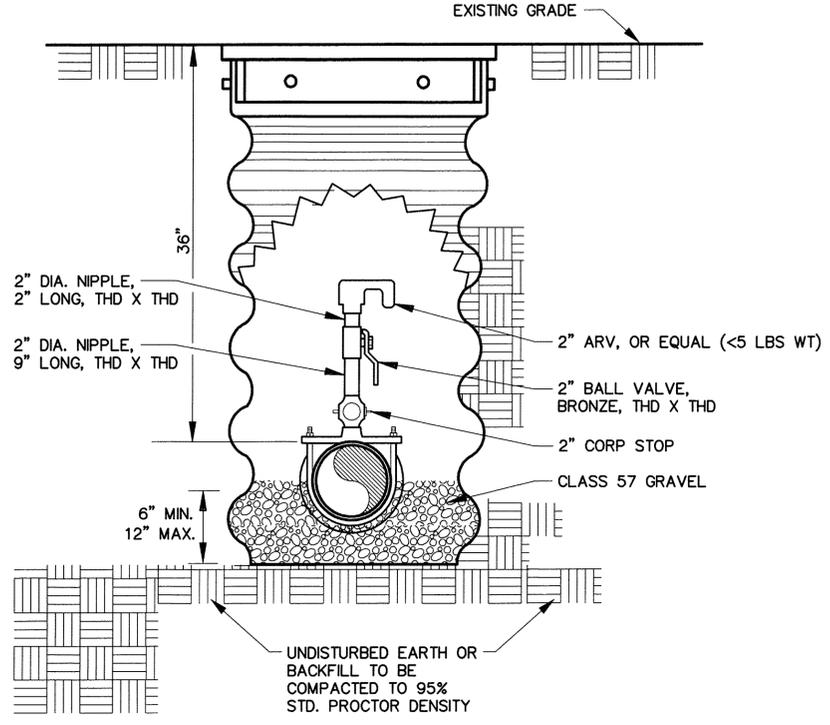

ELEVATION VIEW

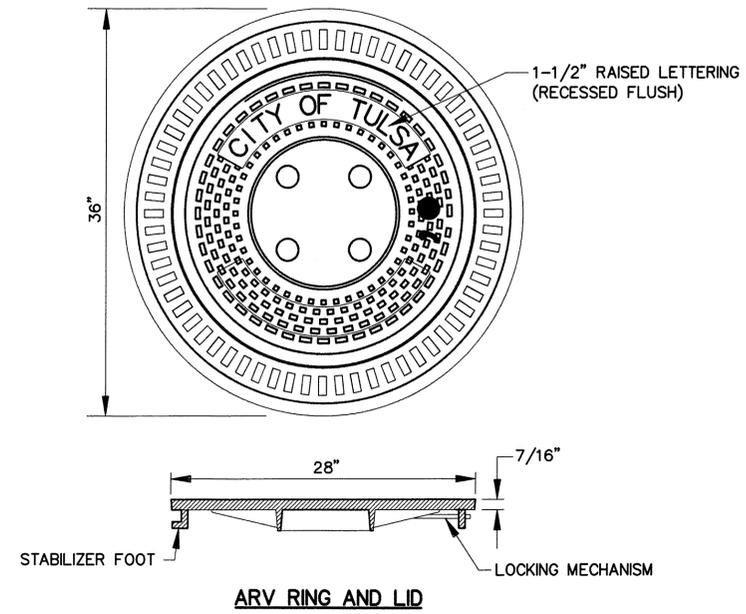

ARV RING AND LID

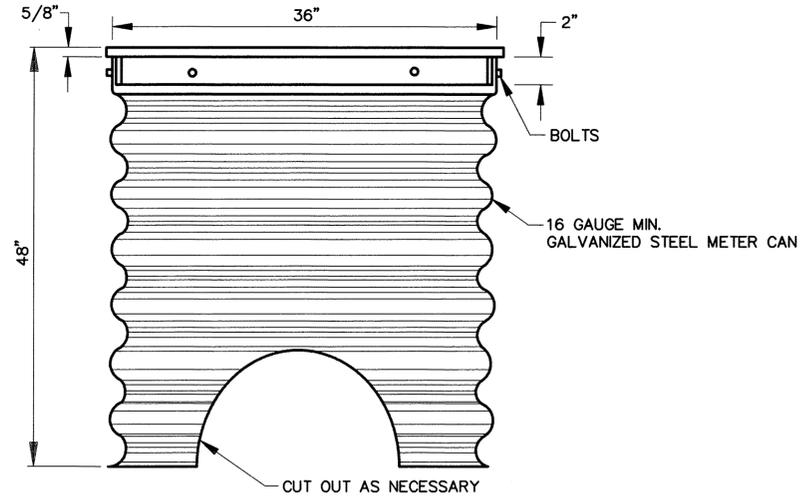

ARV CAN

- NOTE:**
1. ARV'S SHOWN NOT TO EXCEED 5 LBS IN WEIGHT FITTINGS COMPATIBLE WITH THE TYPE OF PIPE FURNISHED.
 2. LOCATE IN GREEN AREAS ONLY.

TO BE FURNISHED AND INSTALLED BY CONTRACTOR

- 1 - 2" COMBO ARV OR EQUAL (5 LBS OR LESS)
- 1 - 36" X 48" METER CAN W/ RIM AND LID
- 1 - 2" CORP STOP
- 1 - 2" X ___ SADDLE
- 1 - 2" NIPPLE, 9" LONG, THD X THD
- 1 - 2" BALL VALVE, BRONZE
- 1 - 2" NIPPLE, 2" LONG, THD X THD

REVISION	BY	DATE

[Signature]
CITY ENGINEER

[Signature]
DESIGN MANAGER

CITY OF TULSA, OKLAHOMA
ENGINEERING SERVICES DEPARTMENT

COMBINATION AIR VACUUM /
RELIEF VALVE VAULT
FOR 2" ARV LESS THAN
5 LBS IN WEIGHT

DATE: OCTOBER 2013

STD. 327