


PAVED

UNPAVED

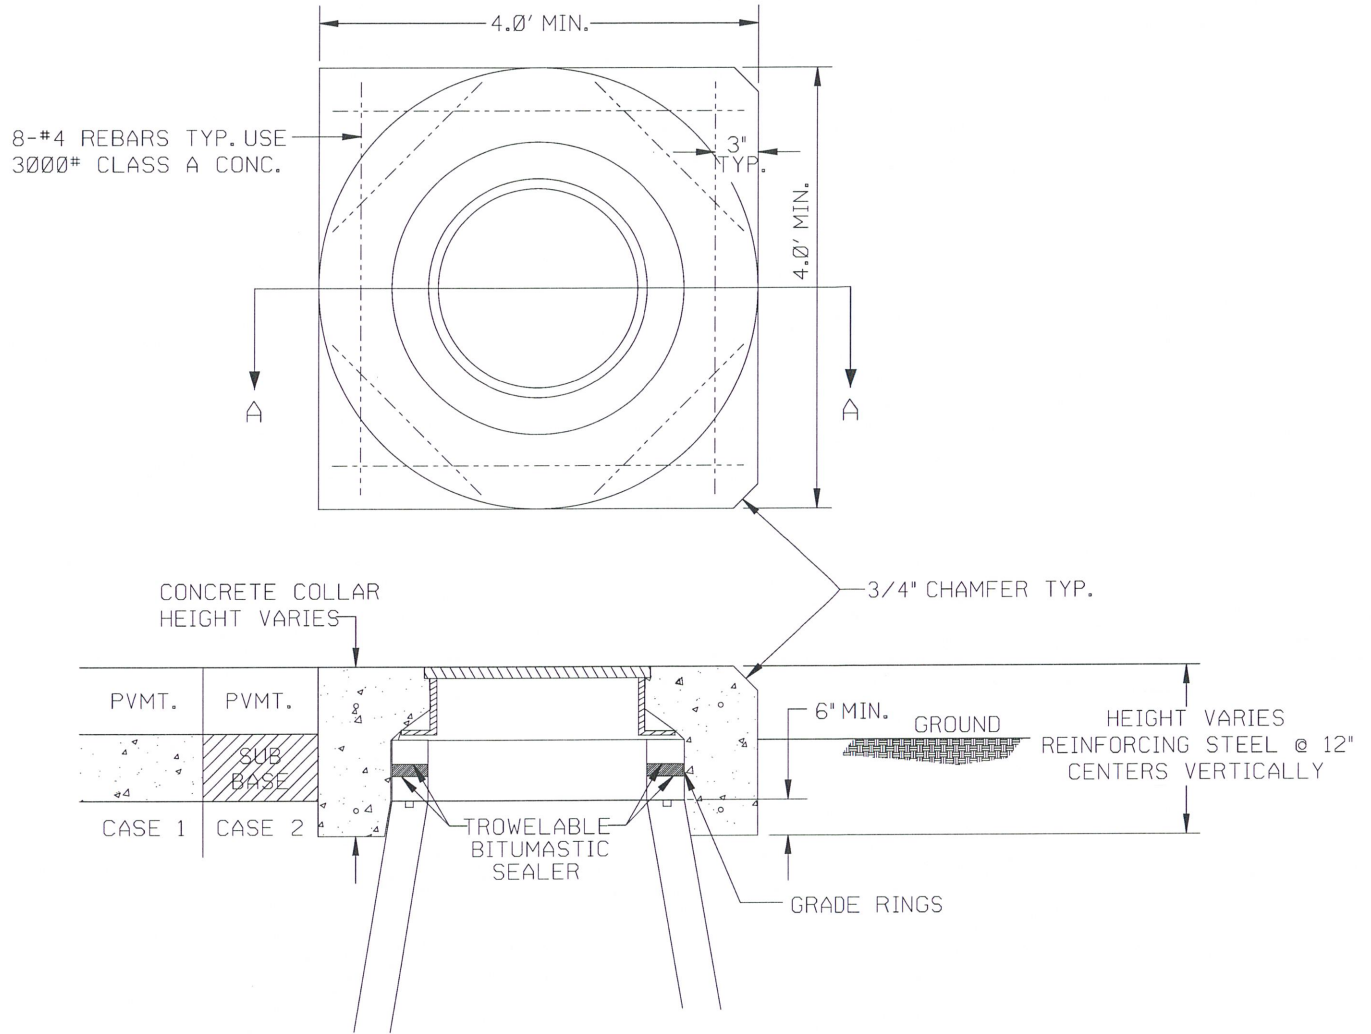

SECTION A-A

CASE 1
COLLAR SHALL EXTEND TO
TOP OF CONCRETE
(REBAR REQ.)

CASE 2
COLLAR SHALL EXTEND 3\" BELOW
BOTTOM OF LOWEST GRADE RING
(REBAR REQ.)

CONCRETE MANHOLE COLLAR DETAILS CIRCULAR OR RECTANGULAR

NOT TO SCALE

NOTES: CONCRETE MANHOLE COLLARS ARE REQUIRED FOR ALL NEW AND REHABILITATED MANHOLES LOCATED IN THE PAVED AREAS AND SHALL BE BROUGHT TO FINISH GRADE WITH CONCRETE. COLLARS SHALL NOT BE USED IN UNPAVED AREAS OR FOR RAISED MANHOLES. REFER TO SPECIFICATIONS 416.3.12

CONCRETE MANHOLE COLLAR

CITY OF TULSA, OKLAHOMA

DRAWN BY: D.J.N.
CHECKED BY:
DATE: SEPT. 2025

APPROVED

NOT TO SCALE

STANDARD NO. 409A