



PUBLIC WORKS
Engineering

DATE: September 15, 2025

TO: PAUL ZACHARY,
PUBLIC WORKS DEPUTY
DIRECTOR

FROM: ^{HAS} H. SOMDECERFF,
PUBLIC WORKS DESIGN
MANAGER

The Specification Review Committee recommends and asks the Public Works Deputy Director to approve the following:

1. Removal of Standard Detail 304A - Trench Detail.
Summary of change: Waterline - NOT USED.

Please call Marqua Jimmerson at (918) 596-7355 If you have any questions.


Thank you,

APPROVED:


Paul Zachary, Deputy Director

09.24.25
Date

Cc: Public Works Engineering Services Specification Review Committee

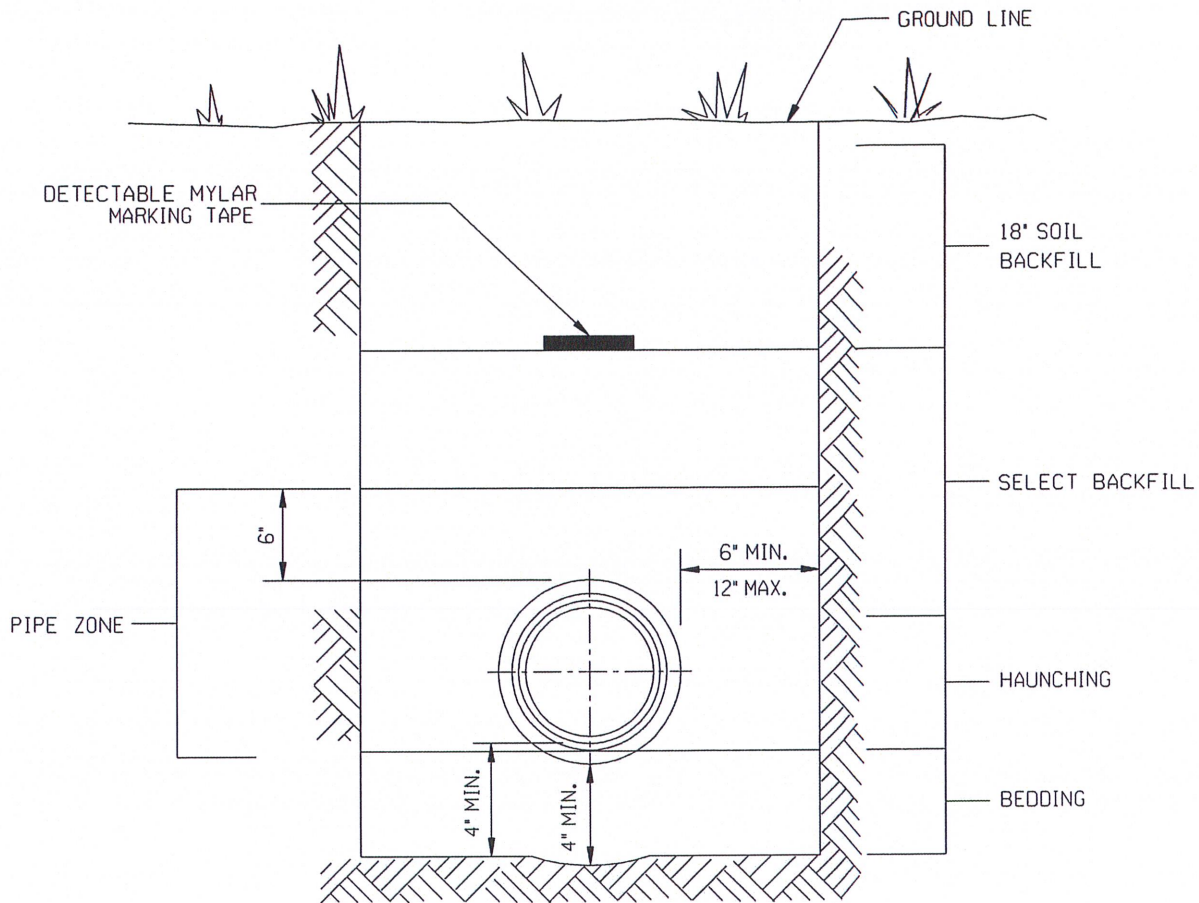

TRENCH CROSS-SECTION

NOTE:

1. BEDDING SHALL BE IN ACCORDANCE WITH STANDARD 305.
2. SELECT BACKFILL SHALL BE IN ACCORDANCE WITH ODOT 703.01 AGGREGATE BASE TYPE A PLACED IN HORIZONTAL LIFTS NOT TO EXCEED 8 INCHES AND THEN COMPACTED. INITIAL BACKFILL SHALL BE TO THE HAUNCH OF THE PIPE IN HORIZONTAL LIFTS NOT TO EXCEED 8 INCHES AND THEN COMPACTED. COMPACTION PROCEDURE AND RESULTS SHALL BE SUBJECT TO APPROVAL OF THE ENGINEER.
3. SOIL BACKFILL SHALL BE IN ACCORDANCE WITH ODOT 616.04.L BACKFILLING.
4. FOR PAVED AREAS, SEE STANDARD DETAIL FOR PAVEMENT REMOVAL AND REPLACEMENT.
5. COMPACTION SHALL BE 95% STANDARD PROCTOR DENSITY PER AASHTO T-99.

TRENCH DETAIL WATERLINE	
CITY OF TULSA, OKLAHOMA ENGINEERING SERVICES DEPARTMENT	
DRAWN BY: R.M.O. CHECKED BY: <i>HAS</i> DATE: MARCH 2022	APPROVED <i>[Signature]</i>
NOT TO SCALE	STANDARD NO. 304A