



PUBLIC WORKS
Engineering

DATE: October 01, 2025

TO: PAUL ZACHARY,
PUBLIC WORKS DEPUTY
DIRECTOR

FROM: ^{HAS} H. SOMDECERFF,
PUBLIC WORKS DESIGN
MANAGER


The Specification Review Committee recommends and asks the Public Works Deputy Director to approve the following:

1. Approve Modification to Standard Detail 367 - Water Table Cradle.
Summary of change: Added references to standard details 304 and 305.

Please call Marqua Jimmerson at (918) 596-7355 If you have any questions.

Thank you,

APPROVED:




Paul Zachary, Deputy Director

10.07.25

Date

Cc: Public Works Engineering Services Specification Review Committee

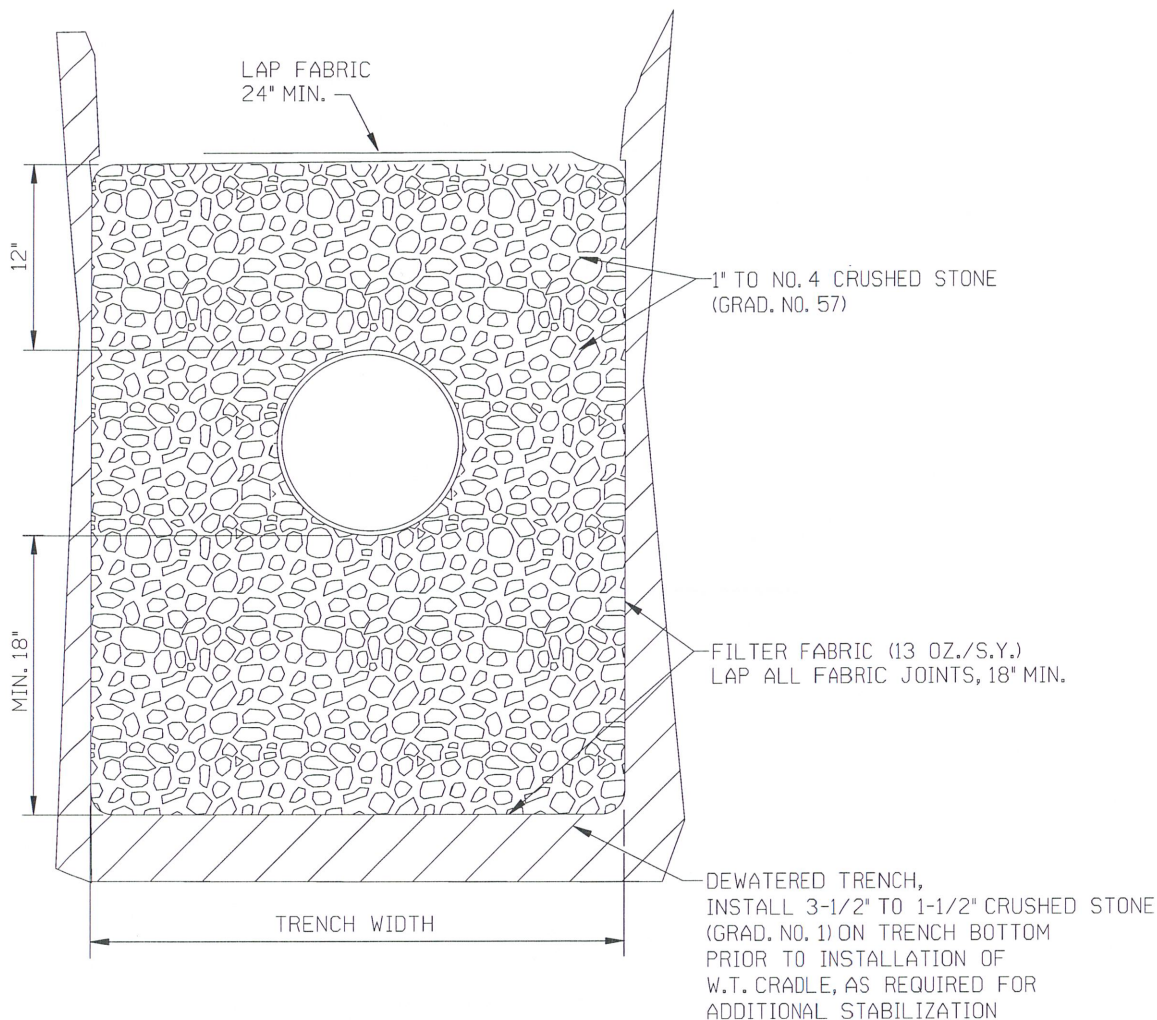

MINIMUM TRENCH WIDTH FOR FLEXIBLE PIPES	
PIPE I.D.	MIN. TR. WIDTH
8" - 12"	3' - 0"
14" - 18"	4' - 6"
20" - 24"	6' - 0"
26" - 30"	7' - 6"
32" - 36"	9' - 0"

NOTE:
FOR FLEXIBLE PIPE TYPES, SEE NOTE 1 ON
STANDARD NO. 305, TRENCH AND BEDDING DETAIL
FOR FLEXIBLE PIPE.

NOTE:

1. SLIDING TRENCH SUPPORTS SHALL NOT BE PLACED BELOW THE TOP OF THE PIPE.
2. WATER TABLE CRADLE SHALL BE INSTALLED FOR THE FULL WIDTH OF THE TRENCH EXCAVATION.
3. FOR RIGID PIPES USE THE TRENCH WIDTH IN STANDARD NO. 304, TRENCH AND BEDDING DETAIL FOR RIGID PIPE. SEE TABLE FOR FLEXIBLE PIPES.

STANDARD DETAIL WATER TABLE CRADLE	
CITY OF TULSA, OKLAHOMA	
DRAWN BY: D.J.N.	APPROVED
CHECKED BY: <i>top</i>	<i>[Signature]</i>
DATE: AUGUST 22 2025	
NOT TO SCALE	STANDARD NO. 367