




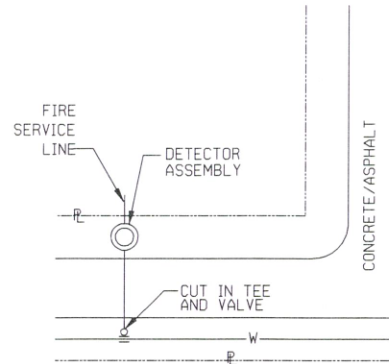


TYPICAL LOCATION
LONG SERVICE

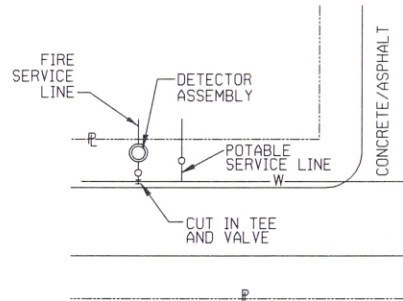


TYPICAL LOCATION
SHORT SERVICE

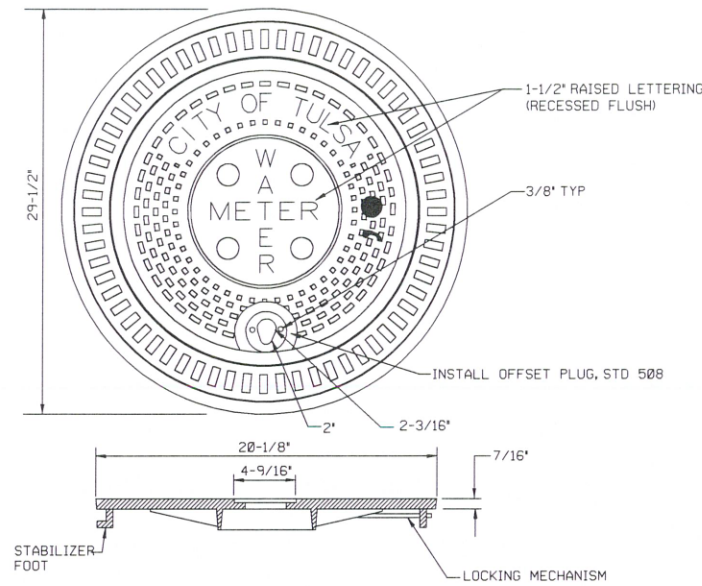


METER BOX RING AND COVER

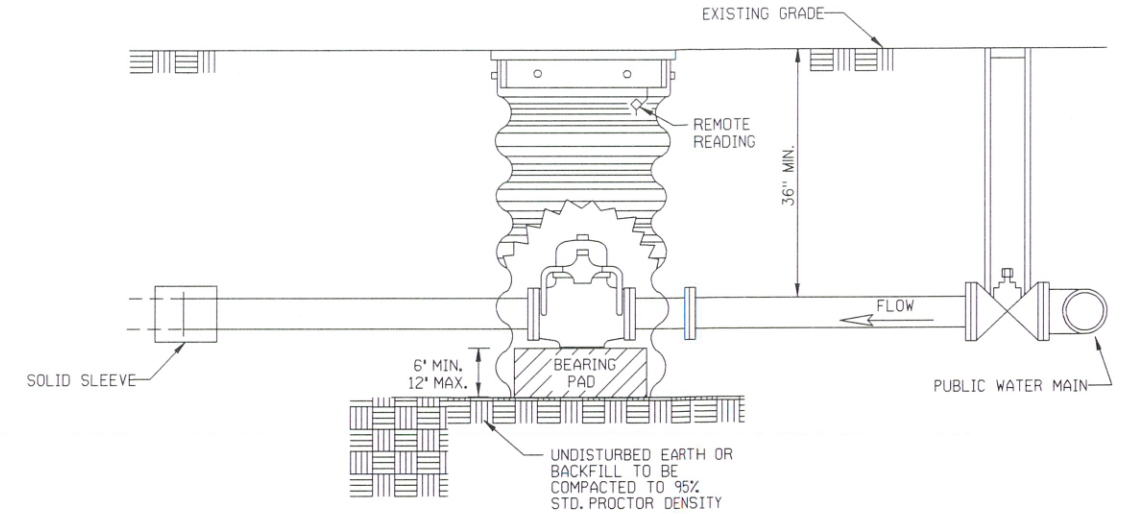

ELEVATION VIEW (8' SHOWN)
SCALE: 1" = 2'

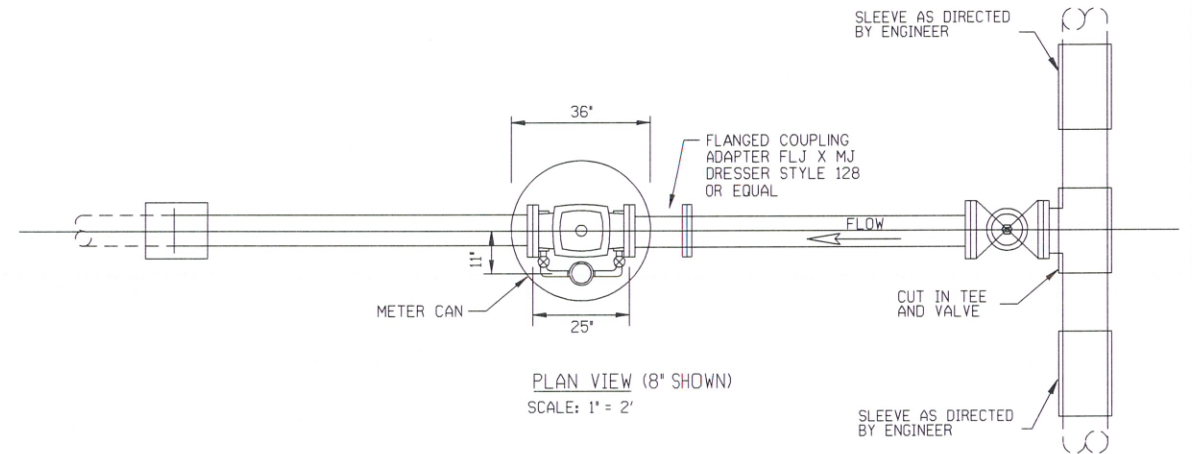

PLAN VIEW (8' SHOWN)
SCALE: 1" = 2'

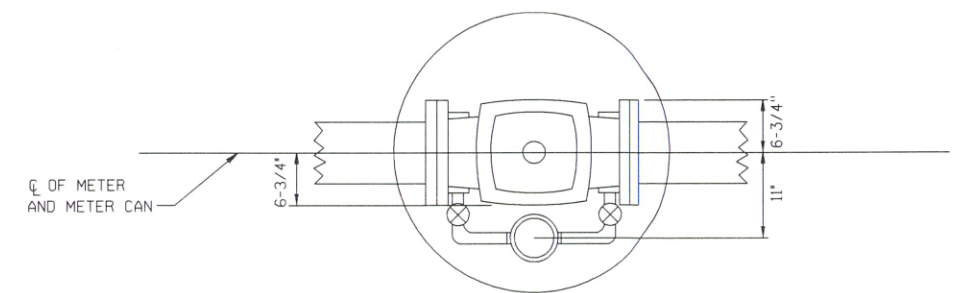


DETAIL PLAN VIEW (8' SHOWN)
SCALE: 1" = 1'

NOTE:

1. CONTRACTOR SHALL BE RESPONSIBLE TO FURNISH FITTINGS COMPATIBLE WITH THE TYPE OF PIPE FURNISHED.
2. NOTICE SHALL BE GIVEN TO THE ENGINEERING SERVICES DEPT. 48 HOURS IN ADVANCE SO THAT A REPRESENTATIVE OF THE DEPT. MAY INSPECT THE MATERIALS.
3. WHERE RESTRAINED JOINTS ARE REQUIRED, THEY SHALL BE EBAA MEGALUG SERIES 1100 OR EQUAL.
4. USE DUCTILE IRON PIPING AND FITTINGS FROM THE MAIN LINE TAPPING SLEEVE TO DOWNSTREAM FROM THE METER CHECK VALVE AT THE CONNECTING SLEEVE. PIPE SHALL BE WRAPPED WITH POLYETHYLENE FILM AND TAPED.
5. BACKFLOW PREVENTER TO BE INSTALLED IN BUILDING.
6. LOCATE GALVANIZED METER CAN IN GREEN AREAS ONLY.
7. TAPPING SLEEVE AND VALVE CONNECTIONS ARE APPROVED ON AN AS NEEDED BASIS THROUGH A TECHNICAL VARIANCE.
8. A COMBINATION OF FIRE, DOMESTIC, AND LANDSCAPE METERS IS PROHIBITED. EACH DEMAND REQUIRES A SEPARATE SERVICE CONNECTION.

TO BE FURNISHED AND INSTALLED BY CONTRACTOR

- 1 - TEE
- 1 - VALVE BOX
- 1 - VALVE
- 1 - DETECTOR CHECK ASSEMBLY
- 1 - FLANGED COUPLING ADAPTER, FLJ X MJ DRESSER 128, OR EQUAL
- 1 - METER CAN W/ RIM AND LID
- PIPE - TYPE MATERIAL AS REQUIRED

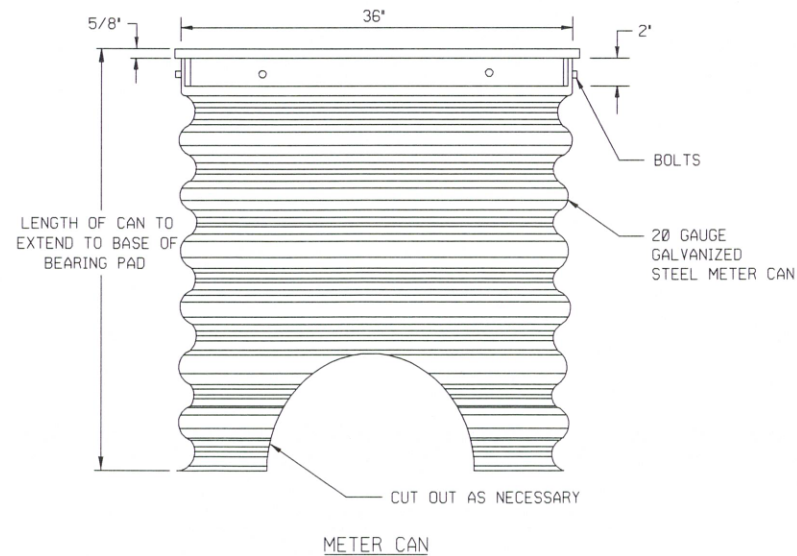

METER CAN

REVISION	BY	DATE

TJN
CITY ENGINEER
tgp
DESIGN MANAGER

CITY OF TULSA

4", 6", 8" DETECTOR CHECK
ASSEMBLY AND METER CAN

DATE: MAY 2025

STD. 551