CITY OF TULSA

PUBLIC WORKS
Engineering

DATE: November 03, 2026

TO: PAUL ZACHARY, PUBLIC WORKS DEPUTY DIRECTOR

FROM: H. SOMDECERFF, PUBLIC WORKS DESIGN MANAGER

The Specification Review Committee recommends and asks the Public Works Deputy Director to approve the following:

1. Approve Modification to Standard Detail 790 – Standard Sidewalk Ramp
   Summary of change:
   - Added Equal Tile as a Manufacturer
   - Revised Dimensions for ADA and PROWAG Requirements.

Please call Marlene Segura at (918) 596-7355 If you have any questions.

Thank you,

APPROVED:


Paul Zachary, Deputy Director

11/03/26
Date


Cc: Public Works Engineering Services Specification Review Committee

1836 × 1898

TUL × USA




TYPE ''A''




USE TYPE 'B' RAMP WHEN OBSTRUCTIONS, WHICH ARE NOT TO BE REMOVED, ARE ENCOUNTERED ON EITHER SIDE OF WHEELCHAIR RAMPS.

TYPE ''B''




▲ FOR MEDIAN GREATER THAN 15'-9'' USE TYPE ''B'' RAMP WITH MINIMUM 48'' LANDING - IF MEDIAN IS 15'-9'' OR LESS (6'-0'' MIN.) SIDES ARE TO BE FORMED AS SHOWN IN THE DETAIL BELOW.


TYPE ''C''




TYPE "D"

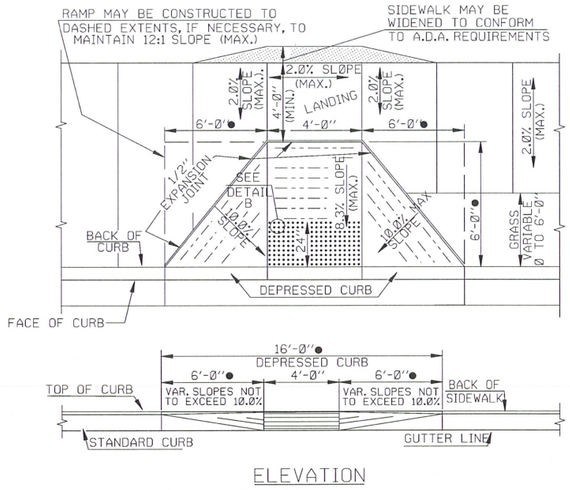


ELEVATION

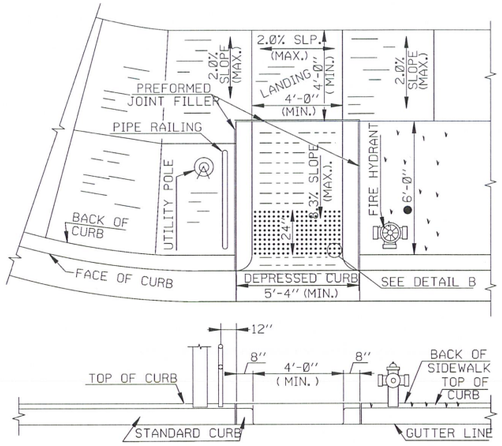

ELEVATION

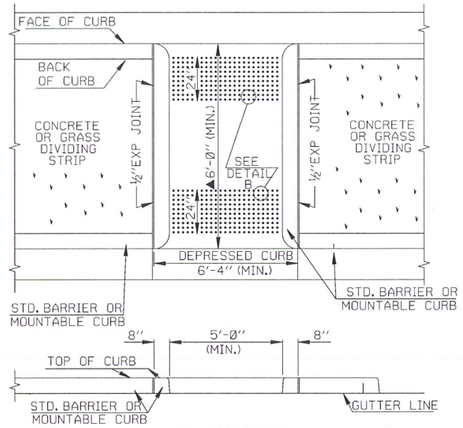


ELEVATION

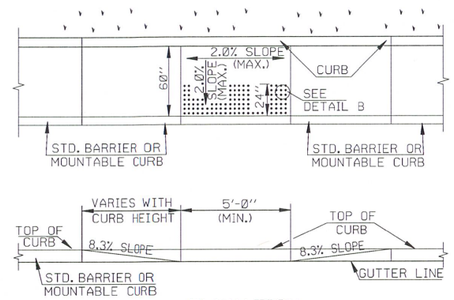

ELEVATION


GENERAL NOTES

1. RAMP DIMENSIONS SHOWN ARE BASED ON A CURB HEIGHT OF SIX INCHES. THE DIMENSIONS SHOULD BE ADJUSTED FOR OTHER CURB HEIGHTS. THE MAXIMUM PERMISSIBLE SLOPES OF THE WHEELCHAIR RAMPS IS 8.3% (12:1). RAMP FLAIR MAY BE 10:1 (MAX.).
2. TRANSVERSE GROOVING SHALL NOT BE USED ON RAMPS.
3. DRAINAGE STRUCTURES SHALL NOT BE PLACED IN LINE WITH THE RAMPS.
4. THE NORMAL GUTTER LINE PROFILE SHALL BE MAINTAINED THROUGH THE AREA OF THE RAMP WITH A 2.0% SLOPE (DESIGN MAX.). SEE NOTE NO. 9.
5. WHEELCHAIR RAMPS SHOULD BE LOCATED SO THAT THE RAMP WILL BE ON THE TRAFFIC APPROACH SIDE OF ANY OBSTACLE.
6. WHEELCHAIR RAMPS SHOULD BE BUILT AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER. THE TYPE OF RAMP WILL BE DESIGNATED ON THE PLANS. IF A RAMP IS TO BE CONSTRUCTED AS A COMBINATION OF TWO TYPES (ONE SIDE TYPE A AND ONE SIDE TYPE B), THE RAMP SHALL BE DESIGNATED AS TYPE A-B.
7. PIPE RAILING CONSTRUCTION DETAILS, WHEN REQUIRED AT TYPE B WHEELCHAIR RAMPS, WILL BE SHOWN ON THE PLANS.
8. EXCAVATION, BACKFILL, EXPANSION JOINT MATERIAL, PIPE RAILING, SEALERS, AND OTHER RELATED MISCELLANEOUS ITEMS WILL NOT BE PAID FOR SEPARATELY BUT THE COST THEREOF SHALL BE INCLUDED IN THE COST OF THE SIDEWALK RAMP.
9. ALL FEATURES OF CONSTRUCTION INCLUDING, BUT NOT LIMITED TO, SIDEWALKS, CURB RAMPS, AND CROSSWALK MARKINGS SHALL COMPLY WITH THE PROPOSED RIGHTS-OF-WAY ACCESSIBILITY GUIDELINES (PROWAG).WHERE SPATIAL LIMITATIONS OR EXISTING FEATURES WITHIN THE LIMITS OF THE PROJECT PREVENT FULL COMPLIANCE WITH PROWAG, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER UPON DISCOVERY OF SUCH FEATURE(S). THE CONTRACTOR SHALL NOT PROCEED WITH ANY ASPECT OF THE WORK WHICH IS NOT IN FULL COMPLIANCE WITH THE PROWAG WITHOUT PRIOR WRITTEN APPROVAL FROM THE ENGINEER. ANY WORK WHICH IS NOT PERFORMED WITHIN THE GUIDELINES OF THE PROWAG, FOR WHICH THE CONTRACTOR DOES NOT HAVE WRITTEN APPROVAL, SHALL BE CORRECTED AT THE CONTRACTOR'S EXPENSE.
10. AGGREGATE BASE SHALL BE PAID FOR SEPARATELY AND ESTIMATED AT 2.4 C.Y. FOR EACH RAMP AT CORNER LOCATIONS.
11. WHEELCHAIR RAMPS SHALL BE PAID FOR BY EACH. BOLD OUTLINE INDICATES PAY ITEM LIMITS.
12. THERE WILL BE NO PAYMENT MADE FOR CONCRETE CURB & GUTTER AND/OR INTEGRAL CURB FOR THE LENGTH OF THE DEPRESSED CURB.
13. THE TRUNCATED DOMES WILL BE MEASURED AND PAID FOR BY THE SQUARE FOOT OF PANEL AREA. THE ROWS OF TRUNCATED DOMES SHALL ALIGN PERPENDICULAR OR RADIAL TO THE GRADE BREAK BETWEEN THE RAMP, LANDING OR BLENDED TRANSISITON AND THE STREET.
14. PIPE RAILING SHALL BE PAID FOR BY THE LINEAR FOOT.
15. SIDEWALKS AND RAMPS SHALL MEET THE ADA ACCESSIBITIY TECHNICAL REQUIREMENTS AS SHOWN AT WWW.ACCESS-BOARD.GOV/PROWAG/

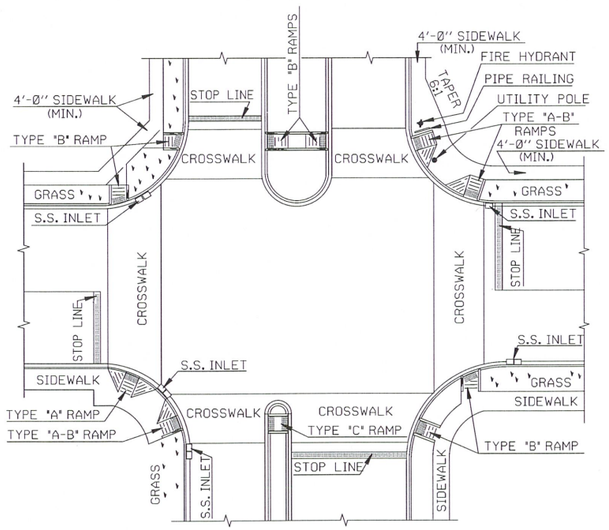


THE ABOVE EXAMPLES ARE TYPICAL ONLY AND ARE SHOWN TO ILLUSTRATE POSSIBLE RAMP TYPES, POSSIBLE RAMP LOCATIONS, POSSIBLE INLET LOCATIONS, AND HOW THE RAMP WILL BE DESIGNATED ON THE PLANS. CARE SHOULD BE EXERCISED TO ASSURE THAT MEDIAN RAMP AND CURB RAMP LINE UP, AND THAT RAMPS THROUGHOUT A PROJECT ARE LOCATED WITH SOME DEGREE OF UNIFORMITY. TYPE 'A' RAMPS SHOULD BE USED WHEREVER POSSIBLE.


THICKNESS OF RAMP AND ADJACENT SIDEWALK SHALL BE A MINIMUM OF 4". AT ARTERIAL INTERSECTIONS THE THICKNESS OF THE RAMP AND SIDEWALK ADJACENT TO THE CURB RADIUS SHALL BE 8".




WHEELCHAIR RAMP PROFILES



AT DRIVEWAY LOCATIONS, THE NORMAL 4'-0'' SIDEWALK MUST BE SET BACK FROM CURB, OR A WIDER SIDEWALK (5'-0'' TYP.) USED TO ASSURE WHEELCHAIR PASSAGE. WHEELCHAIR PASSAGE MUST BE AVAILABLE ON EXTENDED LENGTHS OF SIDEWALKS AT INTERVALS LESS THAN 200 FEET.

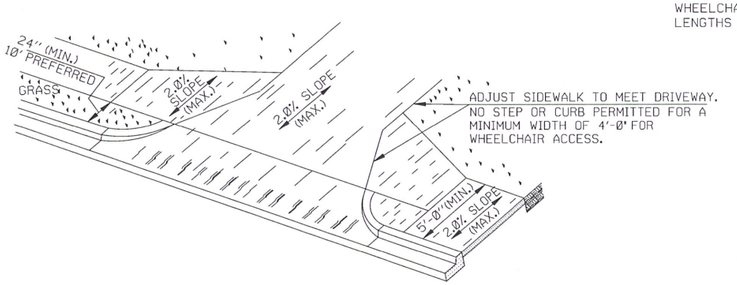




1/2'' EXPANSION JOINT


JOINT FILLER SHALL MEET THE REQUIREMENTS OF SECTIONS 701.08.A AND 701.08.B OF THE 2019 ODOT STANDARDS AND SPECIFICATIONS.

JOINT FILLER SHALL BE USED BETWEEN SIDEWALK AND CURBS, WHEELCHAIR RAMPS, DRIVEWAYS, STREETS, RETAINING WALLS, ETC.

CONTRACTION JOINT SPACED 5 FEET O.C. 1/2" EXPANSION JOINT SPACED 25 FEET O.C. FILLER TO BE 1/2" PREMOLDED BITUMINOUS FIBERBOARD 3/4" DEEP, SEAL 1/2" DEEP WITH SELF-LEVELING SILICONE. SLOPE TOWARD CURB OR DITCH AT 2.0%.



TACTILE MARKERS TRUNCATED DOMES



DETAIL 'B'

TACTILE WARNING DETAILS INSTALLATION NOTES

THE TRUNCATED DOME SURFACE SHALL CONTRAST VISUALLY WITH THE ADJOINING WALKING SURFACES.

THE TRUNCATED DOME PANELS SHALL BE:
- YELLOW IN COLOR, SLIP RESISTANT, AND MEET ALL ADA REQUIREMENTS FOR COLOR CONTRAST AND DIMENSIONS AND SHALL BE:
- FLANGED CAST IN PLACE GLASS AND CARBON REINFORCED COMPOSITE PANEL AS MANUFACTURED BY ADA SOLUTIONS
  OR
- DUCTILE IRON
  OR
- CAST IRON
  OR
- WET SET 10 GAUGE GALVANIZED STEEL AS MANUFACTURED BY TUFTILE
  OR
- WET SET POLYMER AS MANUFACTURED BY TUFTILE, EQUALTILE.

RETROFIT INSTALLATIONS WILL NOT REQUIRE EXISTING DEPRESSED CURBING TO BE REPLACED. A NOMINAL 6 TO 8 INCH SETBACK FROM FACE OF CURB SHALL BE ENFORCED FOR NEAR EDGE OF TACTILE DOMES.

REVISION	BY	DATE

CITY ENGINEER

DESIGN MANAGER HAS

CITY OF TULSA

STANDARD SIDEWALK RAMP

DATE: OCTOBER 2026 STD. 790

PATH NAME: /E1/PARTS/STD/DGN_STDS/790-SIDEWALK-RAMP.DGN DJN 10/26/2026